
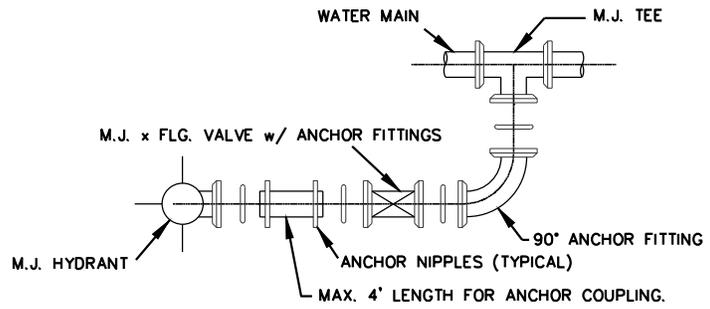


FIRE HYDRANT NOTES:

1. IN GENERAL ALL FIRE HYDRANTS SHALL CONFORM TO AWWA STANDARDS SPECIFICATIONS FOR FIRE HYDRANTS FOR ORDINARY WATER WORKS SERVICE FOR WATER AND SANITARY SEWER IMPROVEMENTS. FIRE HYDRANTS SHALL HAVE A 5-1/4" MINIMUM VALVE OPENING WITH A BARREL APPROXIMATELY 6" INSIDE DIAMETER. ALL HYDRANTS SHALL BE EQUIPPED WITH A BREAKAWAY FLANGE. ALL HYDRANTS SHALL BE APPROVED BY THE CITY.
2. BONNET COLOR:

<u>WATER MAIN CAP</u>	<u>COLOR</u>
6"	TNEMEC 2H HI-BUILD GLOSS, CANDY APPLE RED SAFETY
8"	TNEMEC SERIES 2H HI-BUILD TNEME-GLOSS, TRUE BLUE SAFETY
12" AND LARGER	TNEMEC SERIES 2H HI-BUILD TNEME-GLOSS, SAFETY YELLOW
3. ALL BOLTS AND NUTS USED WITH MECHANICAL JOINT FITTINGS SHALL BE "COR-TEN" OR APPROVED OTHER.
4. A BLUE STEMSONITE (OR APPROVED OTHER) MODEL 88-SSA FIRE HYDRANT MARKER WILL BE INSTALLED OPPOSITE FIRE HYDRANTS JUST OFF CENTER TO THE SIDE OF THE STREET ADJACENT TO THE HYDRANT.
5. INSTALL POLYETHYLENE WRAP AROUND DUCTILE IRON PIPE, RELATED FITTINGS AND VALVES. THIS WRAP SHALL BE 8 MILS. THICKNESS POLYTUBE. SEAMS AND OVERLAPS SHALL BE WRAPPED AND HELD IN PLACE BY TWO (2) INCH WIDE PLASTIC BACKED ADHESIVE TAPE, POLYKEN 900, SCOTCHRAP NO. 50, OR APPROVED OTHER, WITH APPROXIMATE TWO (2) FOOT LAPS ON THE POLYTUBE. THE WRAP ON THE BARREL OF THE PIPE SHALL BE LOOSE ENOUGH TO ALLOW THE FILM TO SHIFT WITH THE SOIL. THE WRAP SHALL BE INSTALLED WITHOUT BREAKS, TEARS OR HOLES IN THE FILM.
6. IN ORDER TO MAINTAIN A MANAGEABLE PARTS INVENTORY AND WORKING KNOWLEDGE OF FIRE HYDRANTS, THE FOLLOWING FIRE HYDRANTS ARE APPROVED: KENNEDY AND WATEROUS THREE-WAY STANDARD THREAD WITH VALVE IN LEAD NO LESS THAN 5-1/4" IN SIZE (WITH STORZ CAP INSERT) OR APPROVED OTHER.

	<h2 style="margin: 0;">FIRE HYDRANT</h2>
	<p>TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS</p>
DATE: 06/07/07 DRAWN BY: HTW APPROVED BY: HTW	<p>SHEET NO. : W01</p>

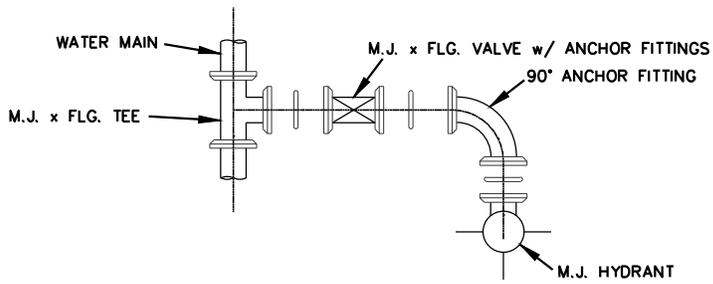

NOTE:
 1. ALL FIRE HYDRANTS MUST BE ANCHORED TO MAIN BY USE OF ANCHOR FITTINGS.
 2. ANCHOR TEES ALLOWED.



FIRE HYDRANT INSTALLATION




TOWN OF PROSPER, TEXAS
 STANDARD CONSTRUCTION
 DETAILS

DATE: 08/07/07
 DRAWN BY: HTW
 APPROVED BY: HTW

SHEET NO. : W02

GUARD POST NOTES:

1. FOR USE WHERE CURBS ARE NOT POSSIBLE OR AS SPECIFIED BY THE CITY ENGINEER.
2. FIRE HYDRANTS SHALL BE 35' CLEAR OF ALL BUILDINGS.
3. GUARD POSTS SHALL BE 6 L.F. OF 6" DIA. STEEL PIPE (3' ABOVE & BELOW GROUND LEVEL). POST SHALL BE ENCASED IN 16" DIA. CONC. PIER TO A DEPTH OF 12" BELOW POST BOTTOM. REINF. CONC. PIER WITH 2 NO. 6 BARS (12" LONG) THRU POST INTO PIER. POST ABOVE GROUND LEVEL SHALL BE PAINTED WITH TWO (2) COATS OF ALUMINUM PAINT.

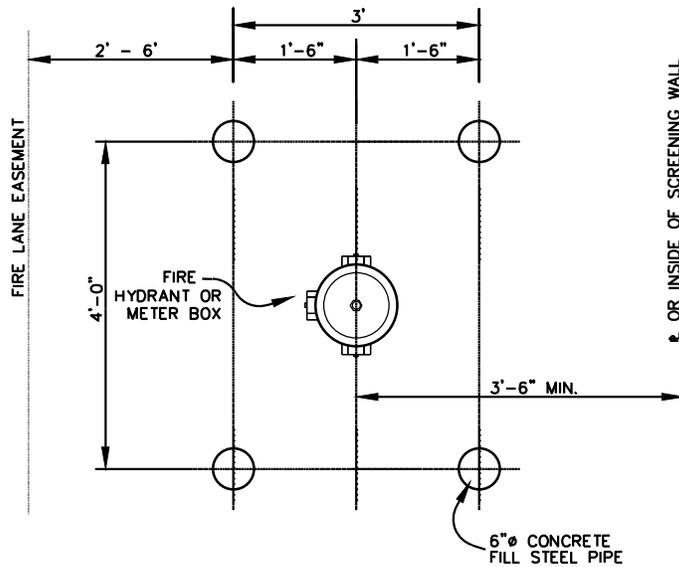


PIPE BOLLARD



TOWN OF PROSPER, TEXAS
STANDARD CONSTRUCTION
DETAILS


DATE: 06/07/07
DRAWN BY: HTW
APPROVED BY: HTW

SHEET NO. : W03

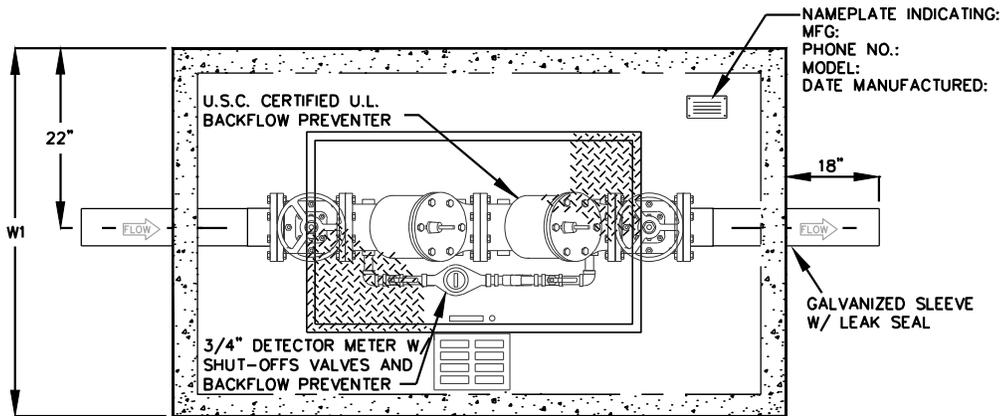

SIZE	L1	W1	H1
4"	7'-10"	4'-4"	6'-0"
6"	7'-10"	4'-4"	6'-0"
8"	8'-8"	5'-0"	6'-0"
10"	9'-2"	5'-8"	6'-6"

PLAN VIEW

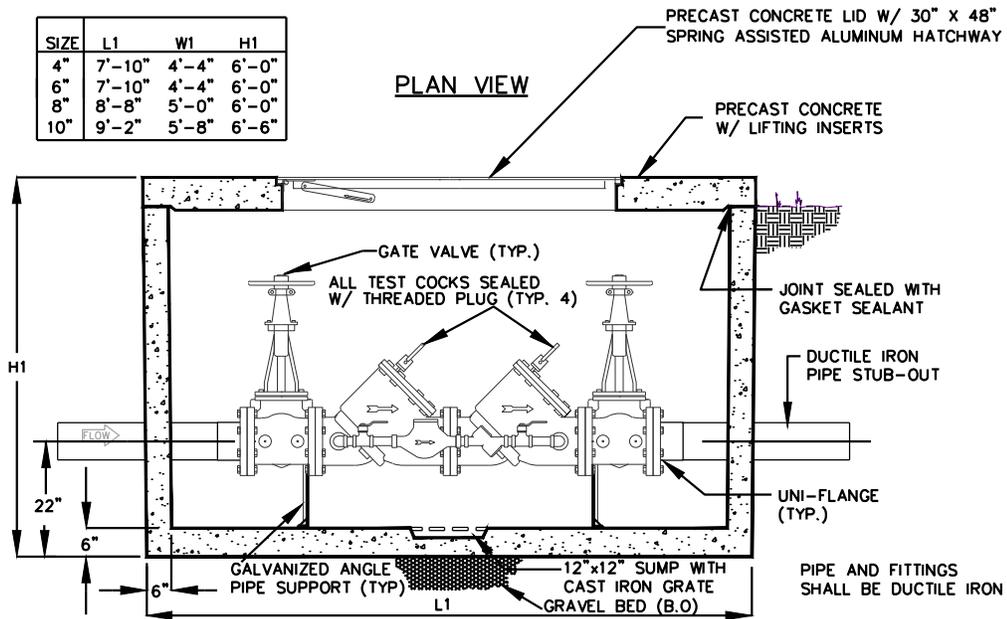

ELEVATION

SPECIFICATIONS

- CONCRETE :** CLASS 1 CONCRETE WITH DESIGN STRENGTH OF 4500 PSI AT 28 DAYS. UNIT IS OF MONOLITHIC CONSTRUCTION AT FLOOR AND FIRST STAGE OF WALL WITH SECTIONAL RISER TO REQUIRED DEPTH.
- REINFORCEMENT:** GRADE 60 REINFORCED STEEL BAR CONFORMING TO ASTM A615 ON REQUIRED CENTERS OR EQUAL.
- HATCHWAY:** 1/4" ALUMINUM DIAMOND PLATE COVER WITH EXTRUDED ALUMINUM FRAME. HATCH TO BE FURNISHED WITH 316 STAINLESS STEEL SNAP LOCK & BRASS HINGES.

PRECAST VAULT SHALL BE FROM PARK EQUIPMENT COMPANY MATCHING DETAIL SHOWN OR APPROVED OTHER.




DOUBLE DETECTOR CHECK FIRE VAULT



TOWN OF PROSPER, TEXAS
STANDARD CONSTRUCTION
DETAILS

DATE: 06/07/07
DRAWN BY: HTW
APPROVED BY: HTW


SHEET NO. : W04

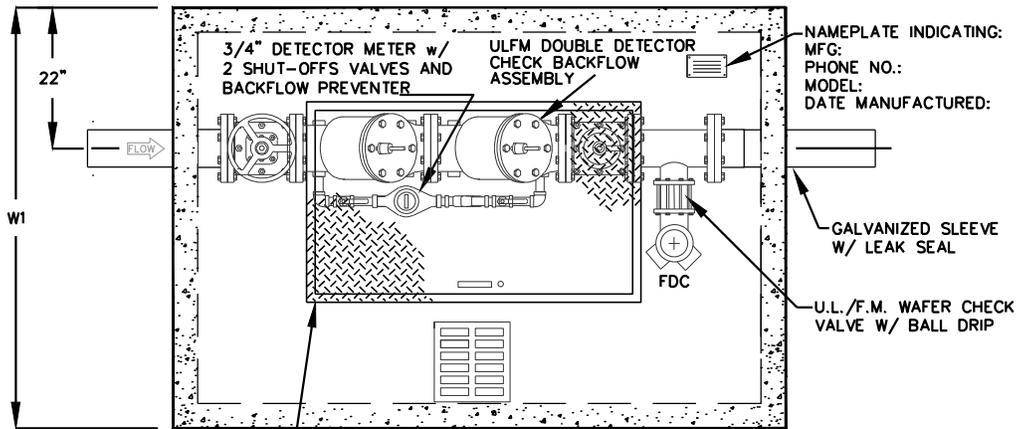

SIZE	L1	W1	H1
4"	7'-10"	4'-4"	6'-0"
6"	8'-8"	5'-0"	6'-0"
8"	9'-0"	6'-0"	6'-6"
10"	11'-0"	6'-0"	7'-0"

PRECAST CONCRETE LID W/ 30" X 48" SPRING ASSISTED ALUMINUM HATCHWAY

PLAN VIEW

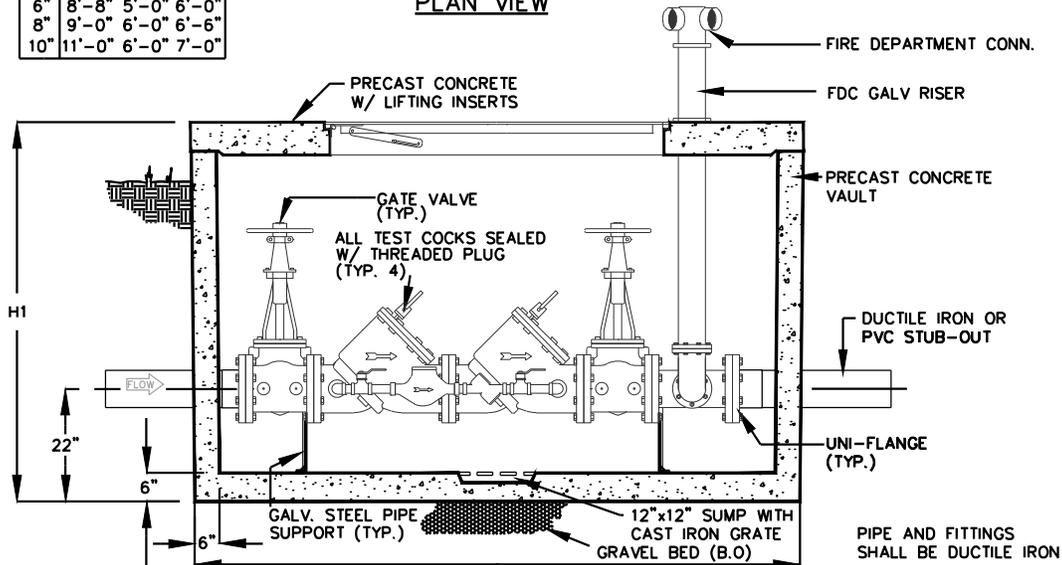

ELEVATION

SPECIFICATIONS

CONCRETE : CLASS 1 CONCRETE WITH DESIGN STRENGTH OF 4500 PSI AT 28 DAYS. UNIT IS OF MONOLITHIC CONSTRUCTION AT FLOOR AND FIRST STAGE OF WALL WITH SECTIONAL RISER TO REQUIRED DEPTH.

REINFORCEMENT: GRADE 60 REINFORCED STEEL BAR CONFORMING TO ASTM A615 ON REQUIRED CENTERS OR EQUAL.

HATCHWAY: 1/4" ALUMINUM DIAMOND PLATE COVER WITH EXTRUDED ALUMINUM FRAME. HATCH TO BE FURNISHED WITH 316 STAINLESS STEEL SNAP LOCK & BRASS HINGES.

PRECAST VAULT SHALL BE FROM PARK EQUIPMENT COMPANY MATCHING DETAIL SHOWN OR APPROVED OTHER.


**DBL. DETECTOR CHECK
FIRE VAULT AND FDC**

**TOWN OF PROSPER, TEXAS
STANDARD CONSTRUCTION
DETAILS**


DATE: 08/07/07
DRAWN BY: HTW
APPROVED BY: HTW

SHEET NO. : W05


CONCRETE PAD 24" SQUARE SHALL BE POURED AROUND ALL VALVE BOXES NOT PLACED WITHIN CONCRETE PAVEMENT. 3000 P.S.I. CONCRETE, 6 INCH THICK

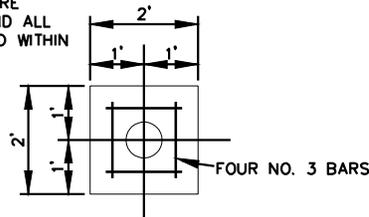

VALVE BOX PAD PLAN
NTS

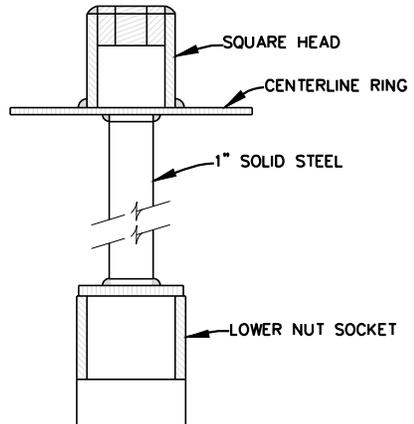


VALVE EXTENSION
NTS

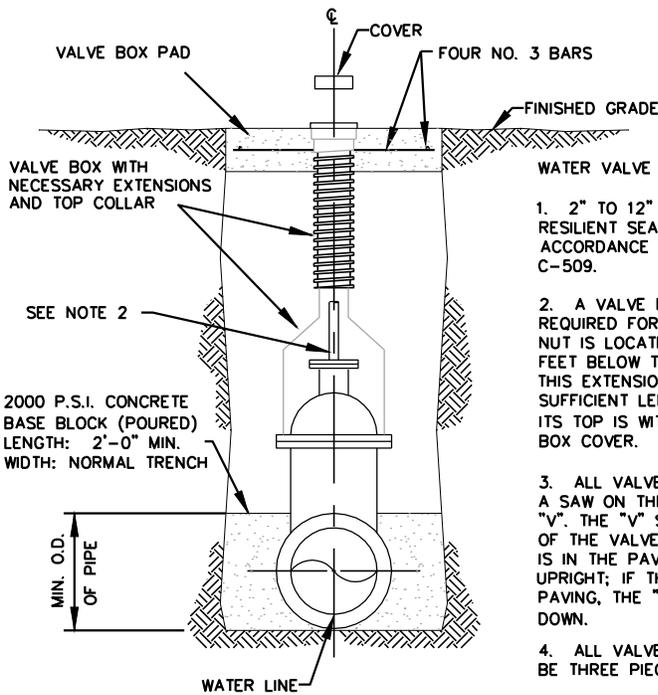

VALVE SETTING & BOX
NTS

WATER VALVE NOTES:

1. 2" TO 12" GATE VALVE SHALL BE RESILIENT SEATED WEDGE GATE VALVES ACCORDANCE WITH AWWA STANDARD C-509.
2. A VALVE EXTENSION STEM SHALL BE REQUIRED FOR ANY VALVE WHOSE OPERATING NUT IS LOCATED IN EXCESS OF 4 FEET BELOW THE TOP OF VALVE BOX. THIS EXTENSION SHALL BE OF SUFFICIENT LENGTH TO INSURE THAT ITS TOP IS WITHIN 2' OF THE VALVE BOX COVER.
3. ALL VALVES SHALL BE MARKED WITH A SAW ON THE CURB OR PAVEMENT WITH "V". THE "V" SHALL POINT TO THE LOCATION OF THE VALVE AS FOLLOWS: IF THE VALVE IS IN THE PAVING, THE "V" SHALL BE MARKED UPRIGHT; IF THE VALVE IS OUTSIDE THE PAVING, THE "V" SHALL BE MARKED UPSIDE DOWN.
4. ALL VALVES STACK COMPONENTS SHALL BE THREE PIECE SCREW TYPE CAST IRON.
5. IN ORDER TO MAINTAIN A MANAGEABLE PARTS INVENTORY AND WORKING KNOWLEDGE OF VALVES, THE FOLLOWING VALVES ARE APPROVED: MUELLER, KENNEDY AND WATEROUS - 150 P.S.I. TEST.

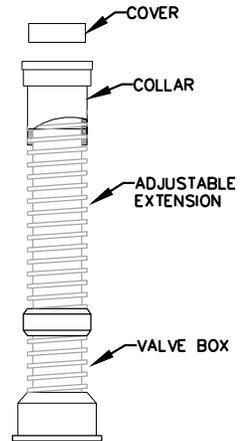

VALVE BOX WITH EXTENSION
NTS




GATE VALVE



TOWN OF PROSPER, TEXAS
STANDARD CONSTRUCTION
DETAILS



DATE: 08/07/07
DRAWN BY: HTW
APPROVED BY: HTW

SHEET NO. : W06

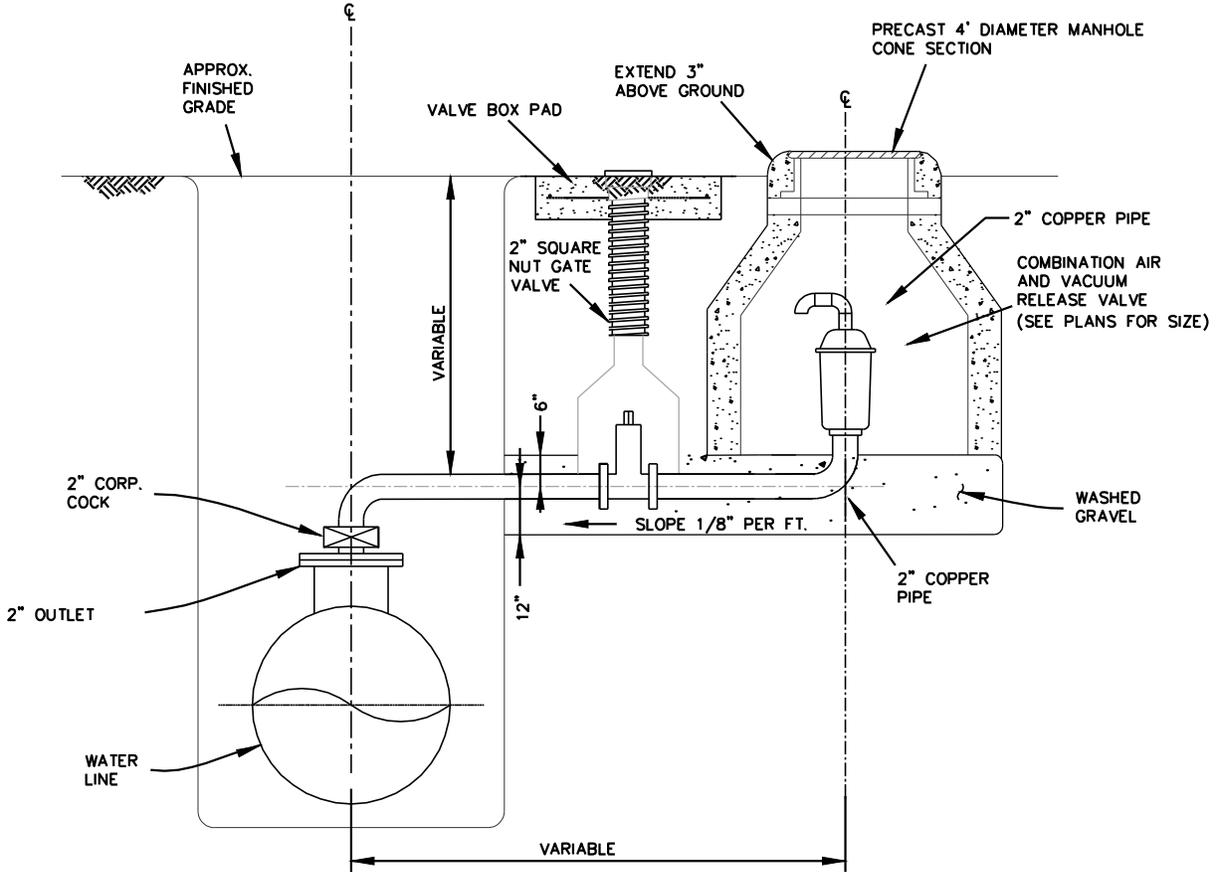


- NOTES:
1. COMBINATION AIR AND VACUUM RELEASE VALVE SHALL BE APCO, CLA-VALVE OR APPROVED OTHER.
 2. LARGER AIR VALVE ASSEMBLY WILL REQUIRE LARGER PIPING AND VALVE (SEE PLANS).

	COMBINATION AIR AND VACUUM RELEASE VALVE	
	TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS	
	DATE: 08/07/07	SHEET NO. : W08
	DRAWN BY: HTW	
	APPROVED BY: HTW	

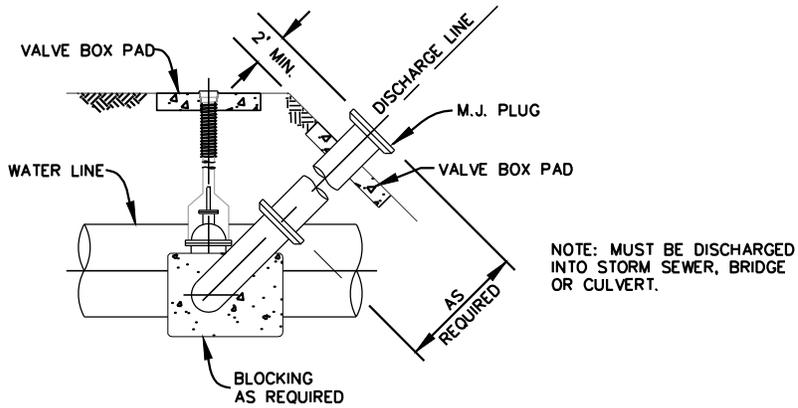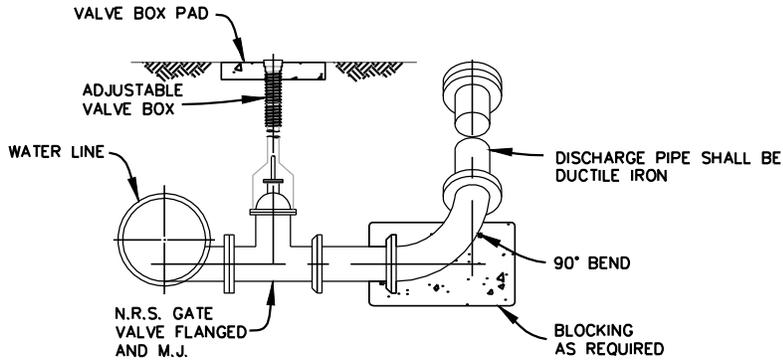


DRAIN VALVE
NTS

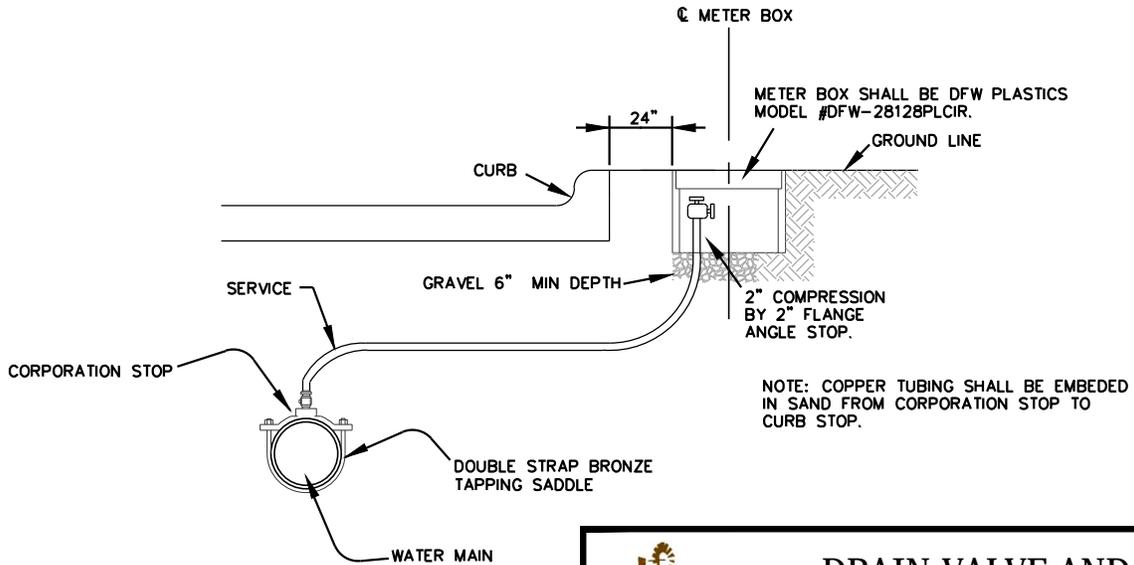


BLOW OFF VALVE WITH METER BOX
(MAINS 12" OR LESS)
NTS

 TOWN OF PROSPER	<h2>DRAIN VALVE AND BLOW OFF VALVE</h2>	
	TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS	
	DATE: 08/07/07 DRAWN BY: HTW APPROVED BY: HTW	
	SHEET NO. : W09	

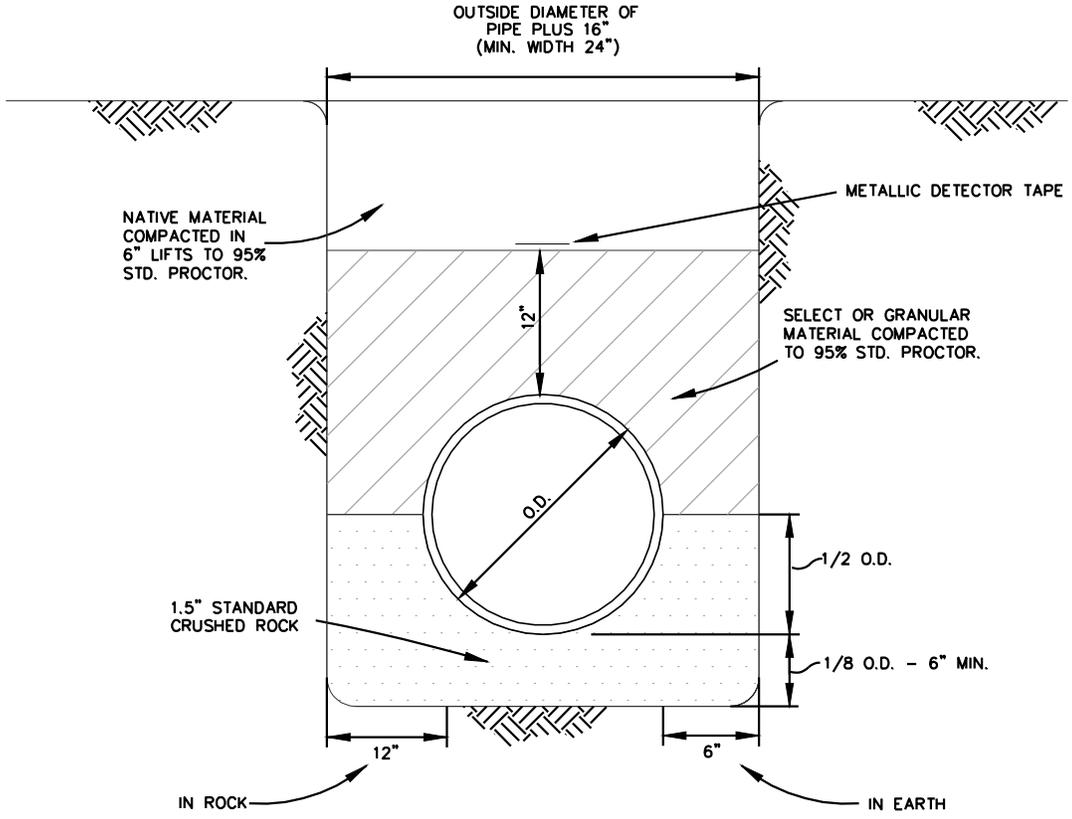

MIN. STD P.V.C. WATER
NTS

	CLASS F1 EMBEDMENT	
	TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS	
	DATE: 08/07/07	SHEET NO. : W10
	DRAWN BY: WLW	
	APPROVED BY: HTW	

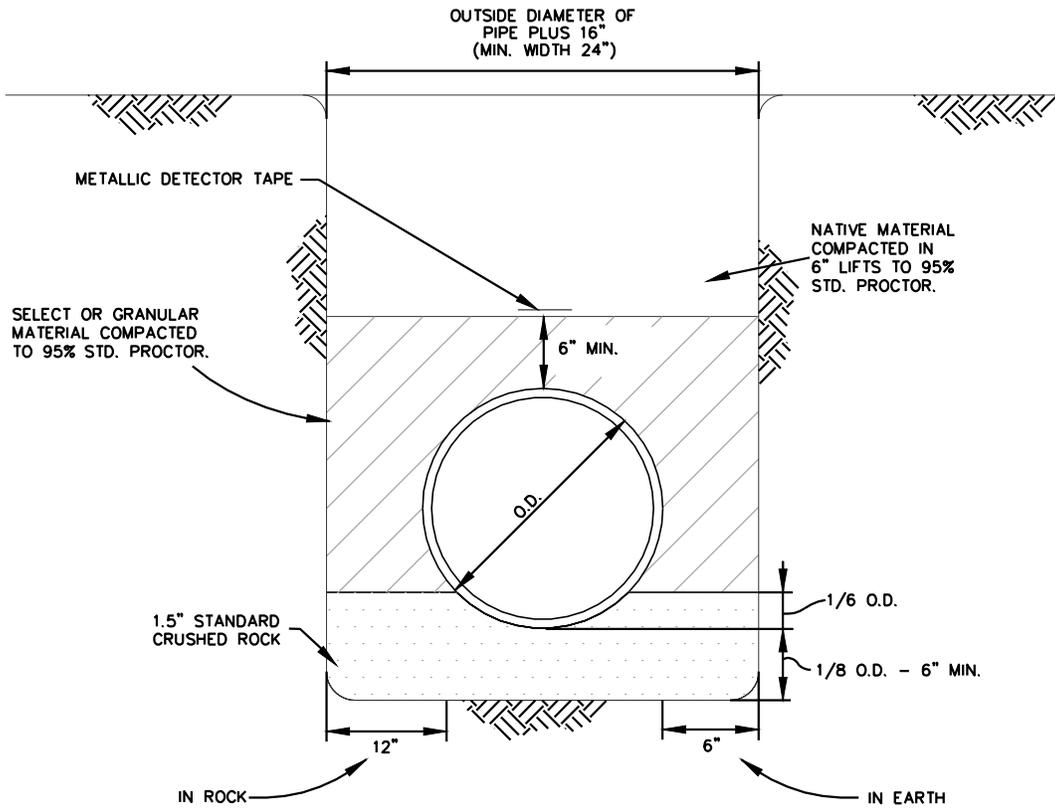


MIN. STD. DUCTILE IRON WATER

MIN. STD. R.C.C.P. WATER

NTS

 <p>CLASS F3 EMBEDMENT</p>				
	<p>TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS</p>			
	<table border="1"> <tr> <td>DATE: 08/07/07</td> <td rowspan="3" style="text-align: center; vertical-align: middle;">SHEET NO. : W11</td> </tr> <tr> <td>DRAWN BY: WLW</td> </tr> <tr> <td>APPROVED BY: HTW</td> </tr> </table>	DATE: 08/07/07	SHEET NO. : W11	DRAWN BY: WLW
DATE: 08/07/07	SHEET NO. : W11			
DRAWN BY: WLW				
APPROVED BY: HTW				

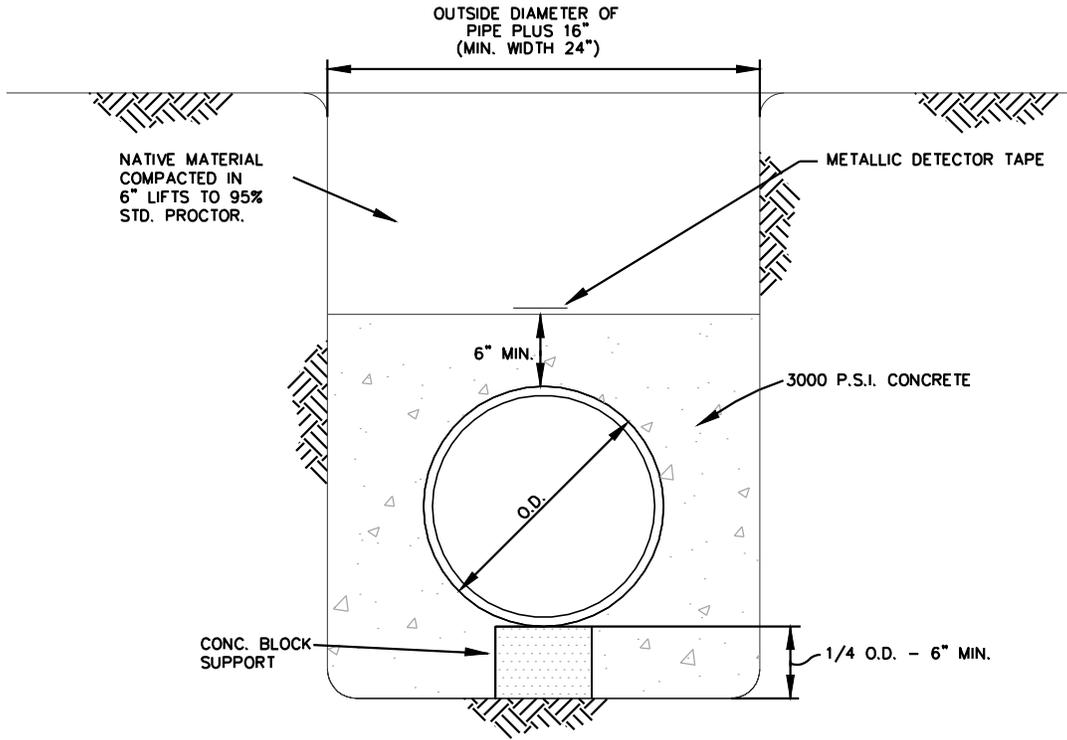


CONCRETE ENCASEMENT

NTS

	<p>CLASS F4 EMBEDMENT</p>				
	<p>TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS</p> <table border="1"> <tr> <td data-bbox="1031 1879 1161 1900">DATE: 08/07/07</td> <td data-bbox="1169 1879 1421 1921" rowspan="3">SHEET NO. : W12</td> </tr> <tr> <td data-bbox="1031 1900 1161 1921">DRAWN BY: WLW</td> </tr> <tr> <td data-bbox="1031 1921 1161 1932">APPROVED BY: HTW</td> </tr> </table>	DATE: 08/07/07	SHEET NO. : W12	DRAWN BY: WLW	APPROVED BY: HTW
DATE: 08/07/07	SHEET NO. : W12				
DRAWN BY: WLW					
APPROVED BY: HTW					


EXTEND SANITARY SEWER LATERAL
10' INSIDE PROPERTY LINE
AT A DEPTH OF 5' THEN AT
A 45 DEGREE ANGLE TO 4'
ABOVE FINISHED GRADE
AND CAPPED.

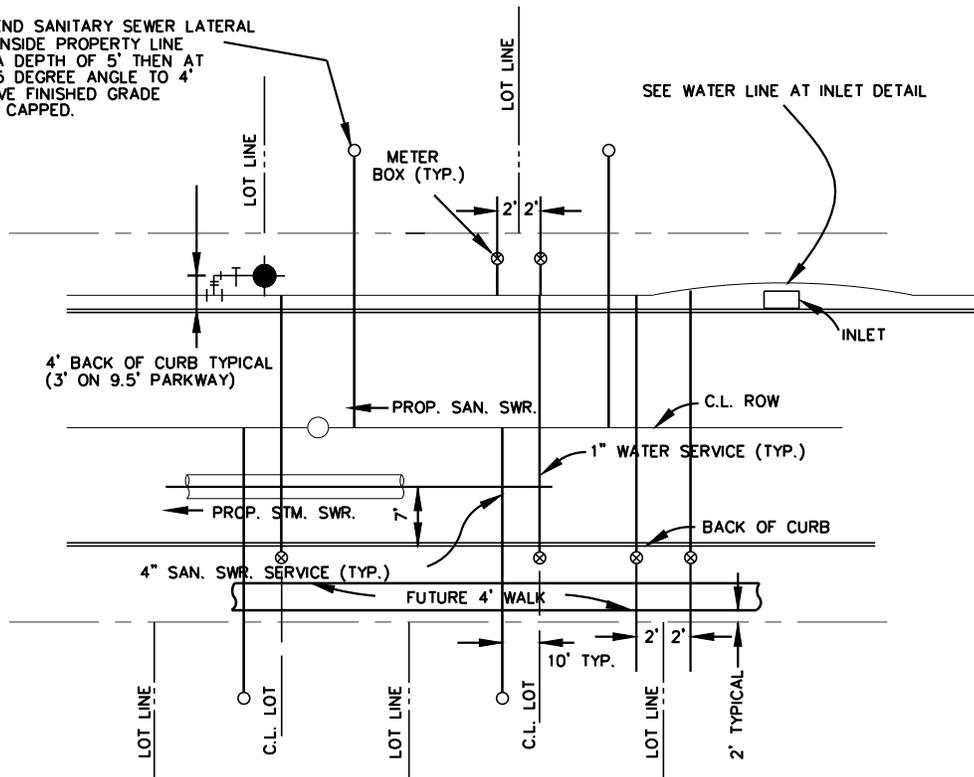

TYPICAL LOT SERVICE DETAIL

NTS

PULL PIPE USING LONGITUDINAL
BENDING (MIN. 250'R) OR JOINT
DEFLECTION IN ACCORDANCE WITH
THE MANUFACTURER'S REQUIREMENTS.

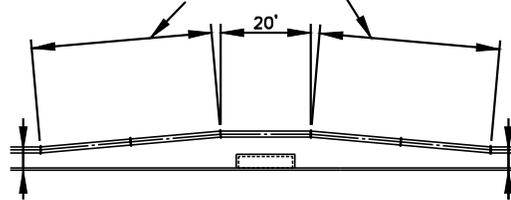

2' BACK OF CURB - TYPICAL
3' BACK OF CURB - LARGER THAN 12"

2' BACK OF CURB - TYPICAL
3' BACK OF CURB - LARGER THAN 12"


WATER LINE AT INLET DETAIL

NTS

 <p>RESIDENTIAL SERVICE LOCATIONS</p>				
	<p>TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS</p>			
	<table border="1"> <tr> <td>DATE: 08/07/07</td> <td rowspan="3" style="text-align: center; vertical-align: middle;">SHEET NO. : W13</td> </tr> <tr> <td>DRAWN BY: HTW</td> </tr> <tr> <td>APPROVED BY: HTW</td> </tr> </table>	DATE: 08/07/07	SHEET NO. : W13	DRAWN BY: HTW
DATE: 08/07/07	SHEET NO. : W13			
DRAWN BY: HTW				
APPROVED BY: HTW				

NOTES:


- A. WATER SERVICES SHALL NOT BE CONNECTED TO FIRE HYDRANT LINES.
- B. ALL MATERIALS SHALL CONFORM TO THE STANDARD SPECIFICATIONS.
- C. METER BOX SIZES:
 - 3/4" AND 1" SHALL BE DFW PLASTICS MODEL # DFW-1814PLCIRSBD.
 - 1-1/2" AND 2" SHALL BE DFW PLASTICS MODEL # DFW-28128PLCIR.
- D. METER BOX SHALL BE LOCATED OUT OF ALL FLATWORK, SIDEWALKS AND APPROACHES.

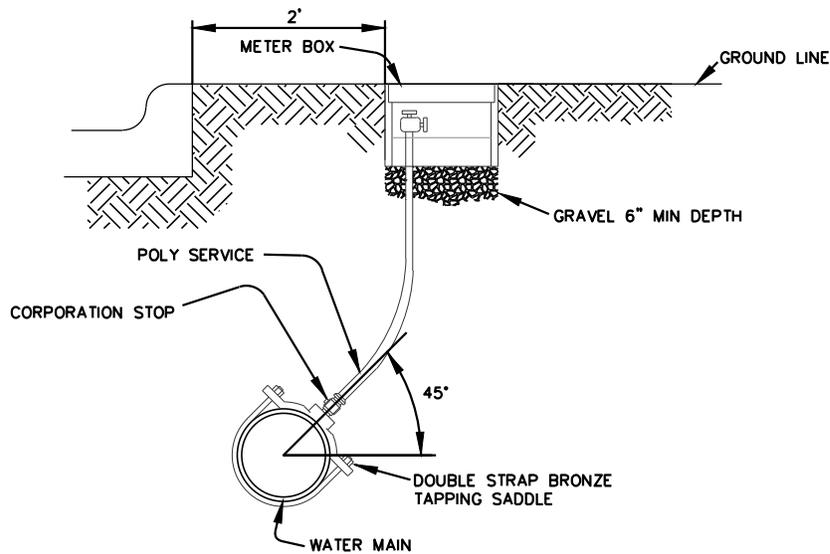

GENERAL INSTALLATION NOTES:


1. WATER METER SHALL BE PLACED 2 FT OFF SIDE YARD PROPERTY LINE WITH THE SANITARY SEWER HOUSE CONNECTION TO BE LOCATED AT THE CENTER OF THE LOT. ALL TAPS SHALL BE MADE AT A 45° ANGLE TO THE CENTERLINE OF THE PIPE.
2. THE CONTRACTOR SHALL SET THE METER BOX IN ALL CASES.
3. THE METER BOX SHALL BE SET WITHIN THE RIGHT-OF-WAY OR A DEDICATED WATER EASEMENT. IN ALL CASES THE METER BOX SHALL BE PROTECTED FROM VEHICULAR TRAFFIC.
4. WATER METER BOX SHALL BE PROTECTED BY A 6" CURB OR GUARD POSTS WHEN PLACED IN A PAVED AREA, WHICH REQUIRES SPECIFIC APPROVAL BY THE CITY ENGINEER OR HIS/HER DESIGNEE.
5. PVC TUBING SHALL BE EMBEDDED IN SAND FROM CORPORATION STOP TO CURB STOP.

 TOWN OF PROSPER		TYPICAL SERVICE CONNECTION
		TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS
<small>DATE: 08/07/07 DRAWN BY: HTW APPROVED BY: HTW</small>		SHEET NO. : W14

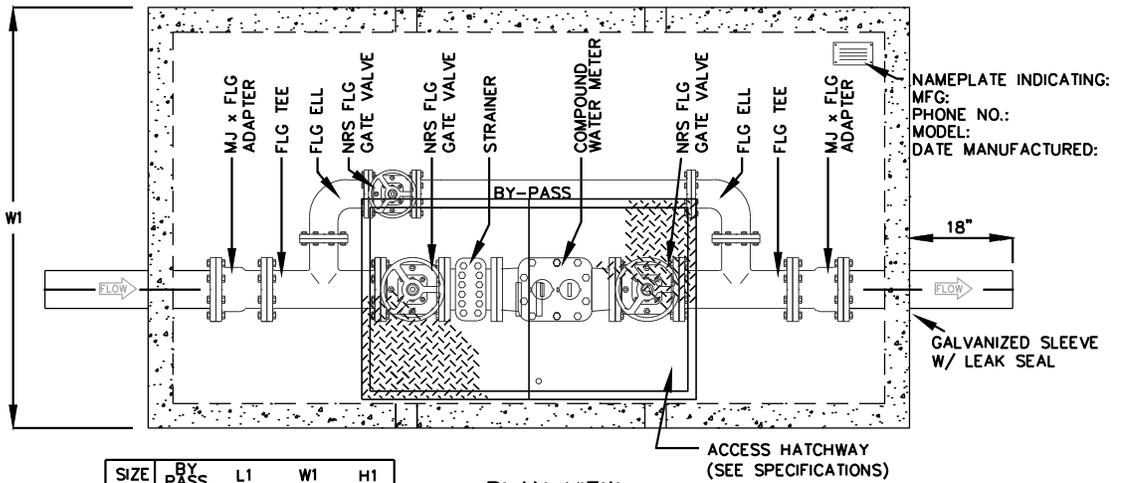

SIZE	BY PASS	L1	W1	H1
3"	2"	8'-8"	4'-8"	4'-6"
4"	2"	8'-8"	4'-8"	4'-6"
6"	4"	11'-0"	6'-0"	4'-6"

PLAN VIEW

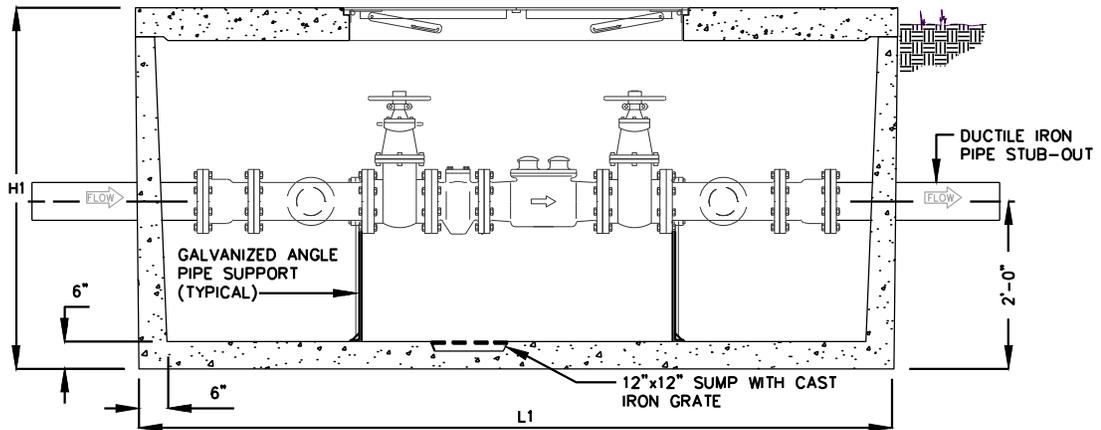

ELEVATION

PIPE AND FITTINGS SHALL BE DUCTILE IRON

SPECIFICATIONS

CONCRETE : CLASS 1 CONCRETE WITH DESIGN STRENGTH OF 4500 PSI AT 28 DAYS. UNIT IS OF MONOLITHIC CONSTRUCTION AT FLOOR AND FIRST STAGE OF WALL WITH SECTIONAL RISER TO REQUIRED DEPTH.

REINFORCEMENT: GRADE 60 REINFORCED STEEL BAR CONFORMING TO ASTM A615 ON REQUIRED CENTERS OR EQUAL.

HATCHWAY: 3' X 5' GALVANIZED STEEL DOUBLE LEAF SPRING ASSISTED HATCHWAY - TRAFFIC RATED W/ SLAM LOCK.

PRECAST VAULT SHALL BE FROM PARK EQUIPMENT COMPANY MATCHING DETAIL SHOWN OR APPROVED OTHER.



DOMESTIC WATER METER VAULT



Hulon T. Webb, Jr.
88679
REGISTERED PROFESSIONAL ENGINEER

TOWN OF PROSPER, TEXAS

STANDARD CONSTRUCTION


DETAILS

DATE: 08/07/07

DRAWN BY: HTW

APPROVED BY: HTW


SHEET NO. : W15

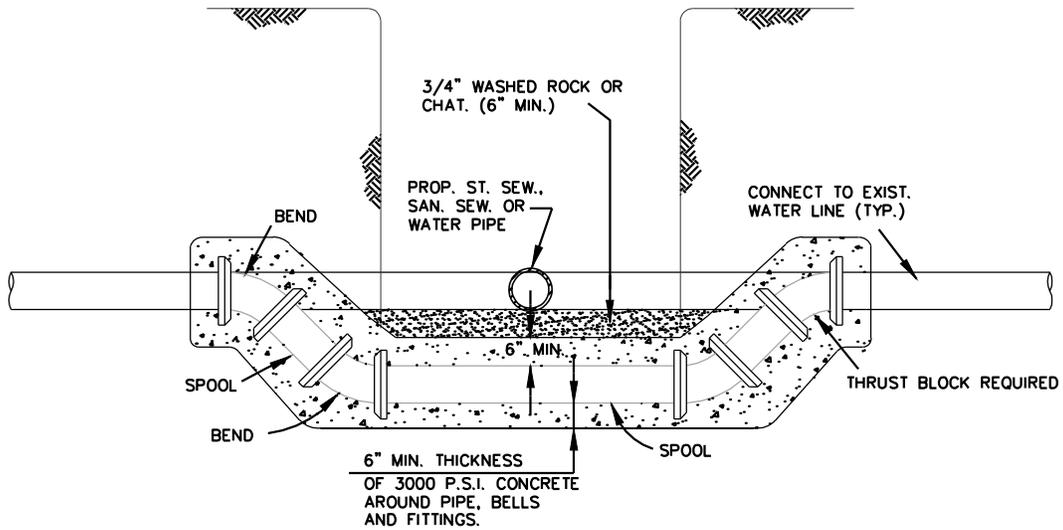

NOTES:


1. PROPOSED WATER PIPE SHALL BE DUCTILE IRON UNLESS OTHERWISE SPECIFIED IN PLANS. ALL FITTINGS SHALL BE DUCTILE IRON (M.J.-P.E.) MEGALUG.
2. PROPOSED PIPING & FITTINGS ARE SYMMETRIC ABOUT CENTER OF PROP. SAN. SEW. OR ST. SEW. PIPE AND SHALL RETAIN TEST PRESSURES.
3. CROSSING OF SANITARY SEWER SHALL BE IN ACCORDANCE WITH TCEQ REQUIREMENTS.

 <p>TOWN OF PROSPER</p>	<p>WATER MAIN LOWERING</p>
	<p>TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS</p>
DATE: 08/07/07 DRAWN BY: HTW APPROVED BY: HTW	<p>SHEET NO. : W16</p>

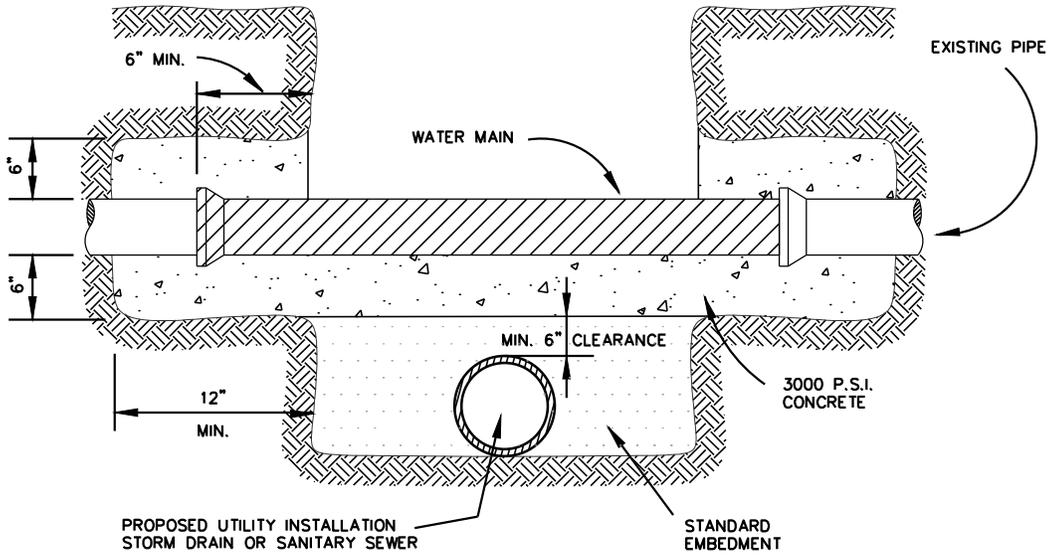


MINIMUM CLEARANCE NOTE:
 1. WHERE A MINIMUM CLEARANCE OF 10'-0" (HORIZONTAL AND/OR VERTICAL) CANNOT BE OBTAINED, THEN THE POTABLE WATER MAIN SHALL BE CONCRETE ENCASED FOR 10'-0" EACH SIDE OF THE INTERSECTION OF THE INSTALLED UTILITY LINE.
 2. CROSSING OF SANITARY SEWER SHALL BE IN ACCORDANCE WITH TNRCC REQUIREMENTS.

	CROSSING UTILITY PIPE SUPPORT	
	TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS	
	SHEET NO. : W17	
	<small>DATE: 08/07/07</small>	
	<small>DRAWN BY: HTW APPROVED BY: HTW</small>	

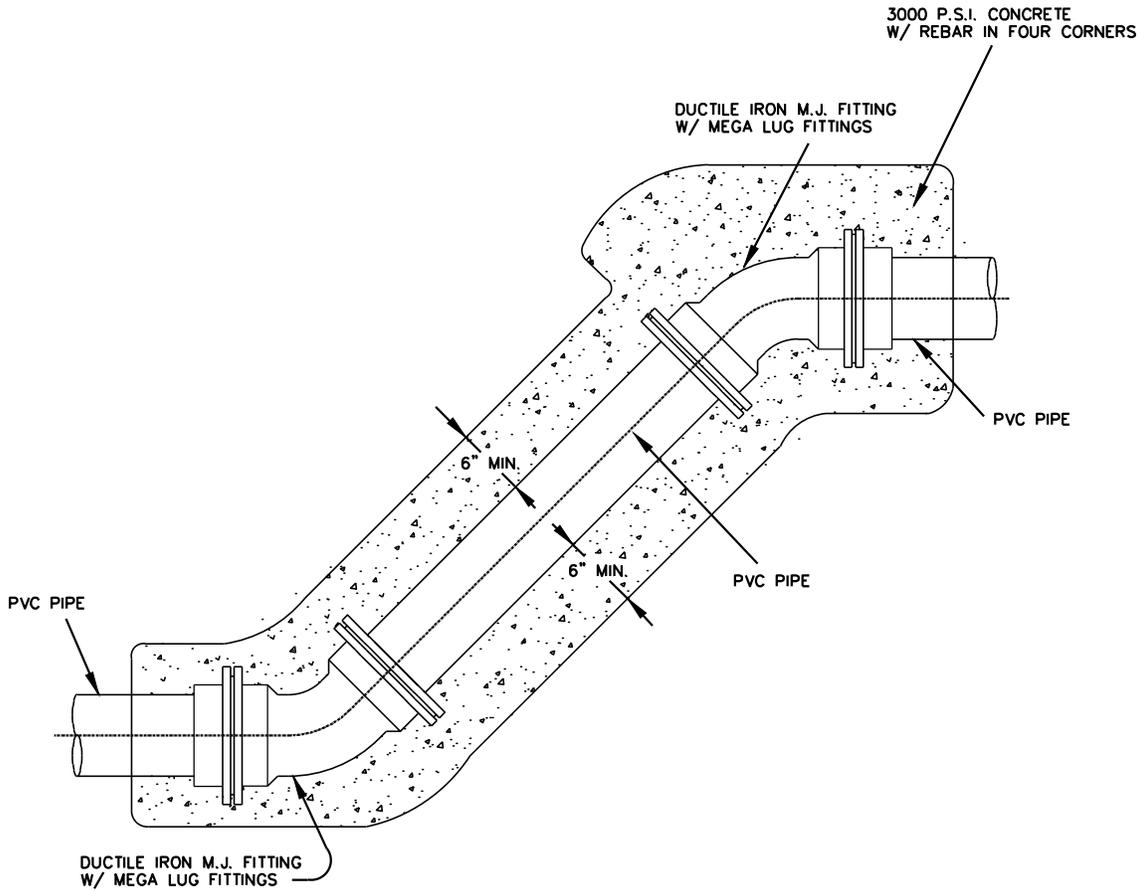

STANDARD HORIZONTAL
AND/OR VERTICAL OFFSETS
NTS

 <p>THRUST HARNESS</p>				
	<p>TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS</p>			
	<table border="1" style="width: 100%;"> <tr> <td style="font-size: small;">DATE: 08/07/07</td> <td rowspan="3" style="text-align: center; vertical-align: middle;">SHEET NO. : W18</td> </tr> <tr> <td style="font-size: small;">DRAWN BY: HTW</td> </tr> <tr> <td style="font-size: small;">APPROVED BY: HTW</td> </tr> </table>	DATE: 08/07/07	SHEET NO. : W18	DRAWN BY: HTW
DATE: 08/07/07	SHEET NO. : W18			
DRAWN BY: HTW				
APPROVED BY: HTW				

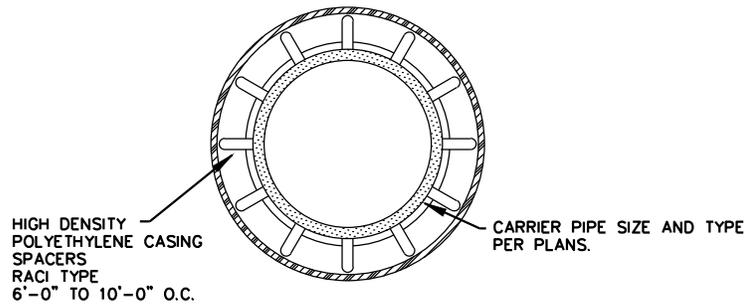


CASING SPACERS SHALL BE USED TO INSTALL CARRIER PIPE INSIDE THE ENCASEMENT PIPE. TO PROVIDE SUPPORT AROUND THE PERIPHERY OF THE PIPE SHOULD THE PIPE TWIST AS IT IS PUSHED THROUGH THE CASING, THE SPACERS SHALL BE OF A PROJECTION TYPE THAT HAS A MINIMUM NUMBER OF PROJECTIONS AROUND THE CIRCUMFERENCE TOTALLING THE NUMBER OF DIAMETER INCHES. FOR EXAMPLE, 8" PIPE SHALL HAVE A MINIMUM OF 8 PROJECTIONS AND 18" PIPE SHALL HAVE A MINIMUM NUMBER OF 18 PROJECTIONS.

CASING SPACERS SHALL HAVE A MAXIMUM SPACING SPAN OF 10 FEET. THE SPAN BETWEEN SPACERS SHOULD RESULT IN CONSERVATIVE LONG TERM SAFETY FACTOR PROVIDED TOTAL LOAD PER SPACER DOES NOT EXCEED THE MAXIMUM LOAD FOR PIPE FULL OF LIQUID PER SPACER LISTED IN THE LITERATURE FOR CLASS SPACER USED. SPACERS SHALL HAVE A MINIMUM HEIGHT THAT CLEARS THE PIPE BELL OR AS OTHERWISE INDICATED ON PLANS. CASING SPACERS SHALL USE DOUBLE BACKED TAPE PROVIDED WITH THE SPACERS, TO FASTEN TIGHTLY ONTO THE CARRIER PIPE, SO THAT THE SPACERS DO NOT MOVE DURING INSTALLATION.


PIPE INSULATOR DETAIL
NTS

SPACERS SHALL BE RACI HIGH DENSITY POLYETHYLENE OR CITY APPROVED OTHER.

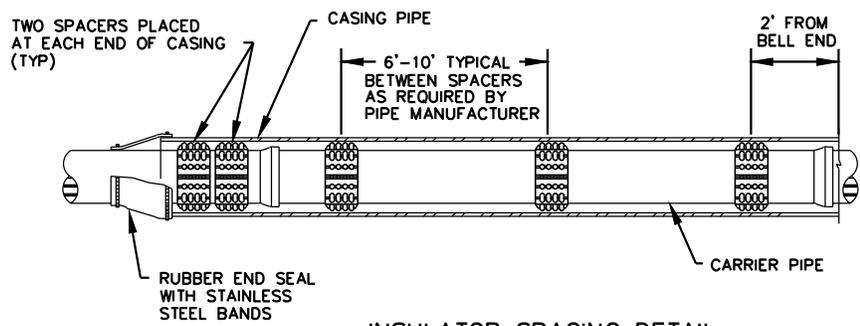


INSULATOR SPACING DETAIL
NTS

	<h2>CASING</h2>	
	<h3>TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS</h3>	
<small>DATE: 08/07/07</small> <small>DRAWN BY: HTW</small> <small>APPROVED BY: HTW</small>	SHEET NO. : W19	

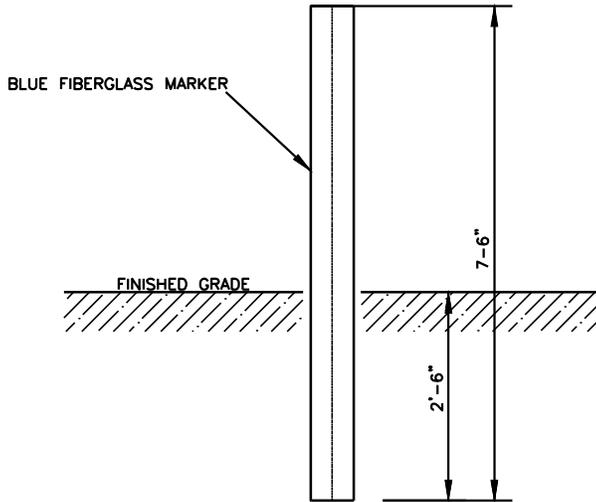

ELEVATION

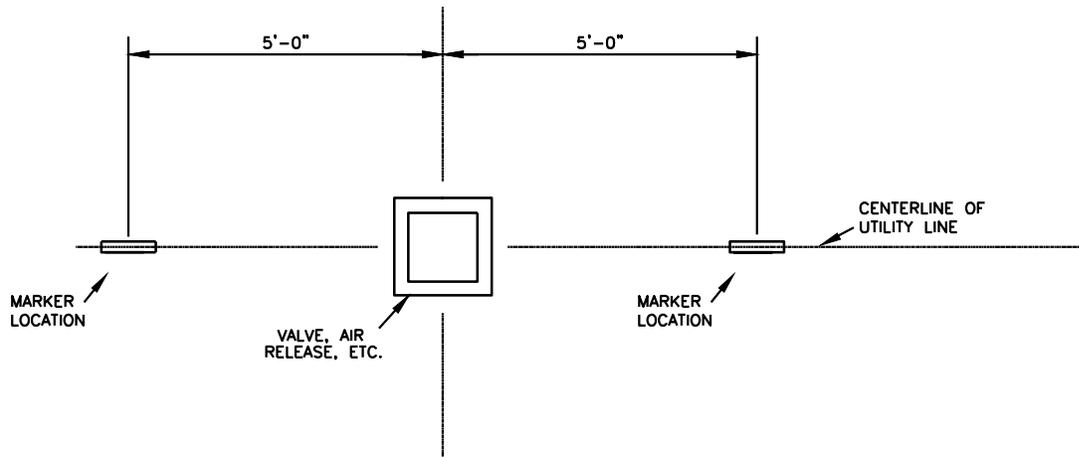

FIELD INSTALLATION DETAIL

GENERAL NOTES

1. ALL OFFSITE CITY OF FRISCO MAINS WITH VALVES, AIR RELEASE VALVES, ETC. SHALL BE MARKED AS DETAILED ON THIS SHEET.

	<p>OFFSITE WATER MAIN MARKER</p>		
	<p>TOWN OF PROSPER, TEXAS STANDARD CONSTRUCTION DETAILS</p> <table border="1"> <tr> <td data-bbox="1015 1879 1161 1932"> <p>DATE: 08/07/07 DRAWN BY: HTW APPROVED BY: HTW</p> </td> <td data-bbox="1161 1879 1437 1932"> <p>SHEET NO. : W20</p> </td> </tr> </table>	<p>DATE: 08/07/07 DRAWN BY: HTW APPROVED BY: HTW</p>	<p>SHEET NO. : W20</p>
<p>DATE: 08/07/07 DRAWN BY: HTW APPROVED BY: HTW</p>	<p>SHEET NO. : W20</p>		